




AN-1632 Audio Distribution Amplifier



Features:

- Designed for military, intelligence, and professional applications
- 16 Channel buffer and distribution amplifier Audio Network
- 16 transformer coupled inputs and two sets of 16 solid 'balanced' outputs.
- Easy Connection to balanced or unbalanced equipment
- DB-25 Connectors.

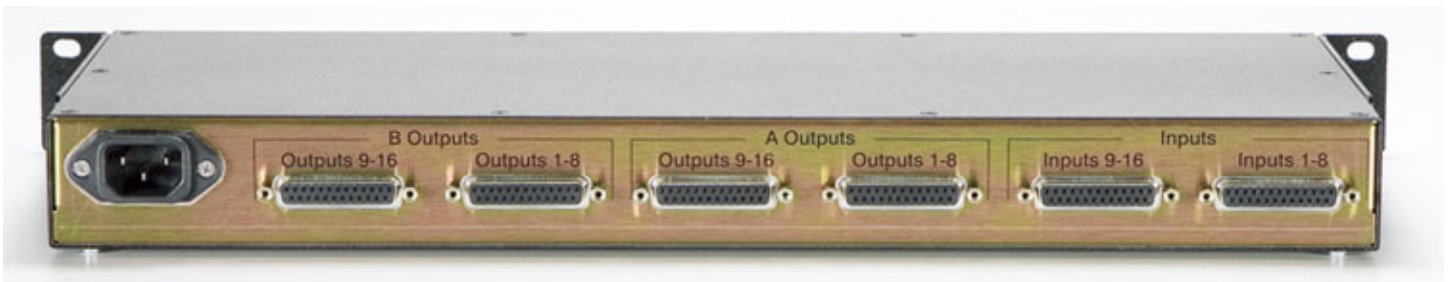

[Audio Network \(AN-1632\) Specifications](#)

Maximum Levels	
Input	4 Volts RMS at 1 KHz
Output	4 Volts RMS
Nominal Gain with an input of 1 kHz	±0.5 dB
Frequency Response relative to 1 kHz	20 Hz to 30 kHz
Power Input	15 Watts, 100 VAC to 240 VAC, 50 Hz tp 400 Hz.

2006-11-11