




**Communications Recording Systems,
Voice Logging Recorders, and Audio Products**
Serving the Public Service Sector Since 1967

Time Code Reader (TR100A2)

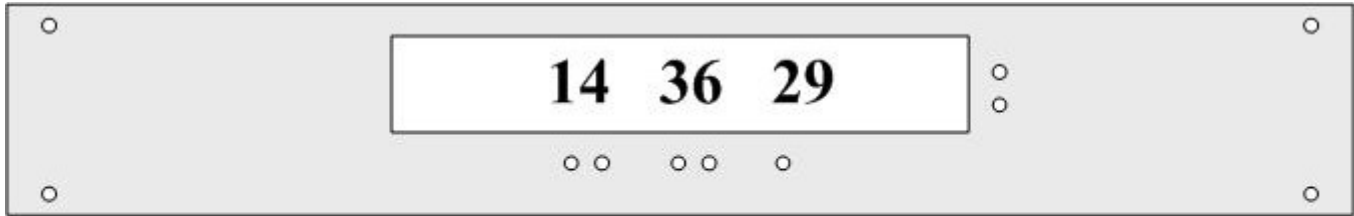

Front View

Features:

The reader reads the time and displays them in the 2137 format. This arrangement provides continuous monitoring of the reader output to assure that a valid high quality signal is being produced



Time Code Reader TR100A2

Code Format	2137
Input	BNC Connect at rear panel.
Input Level Setting	Automatic
Minimum Input Required	200 mc RMS. (560v p-p)
Input Impedance	10 K
Readout	6 digit (7 segment) .40" high LED's. Indicates hours, minutes and seconds in 24 hour military format.
Power Requirement	115 volt AC (100 - 130 range) or 230 volt AC (215 - 250 range) field selectable. 50 to 60 Hz. .15 watt.
	Optional:
	12 volt D.C. (10 - 15 range) or 24 volt D.C. (20 - 30 range). (For 12 volt option specify Model 204A2 - 222D12. For 24 volt option, specify model 204A3-D24.)
Temperature Operating	0° C To 50° C (Non-condensing).
Temperature Storage	-40° C To +70° C
Size	19.0" wide
	1.75 " high
	7.5 deep
Weight	6 lbs. (2.8kg).

2005-12-05