




**Communications Recording Systems,  
Voice Logging Recorders, and Audio Products**  
Serving the Public Service Sector Since 1967

## Time Code Reader (TR100A2)

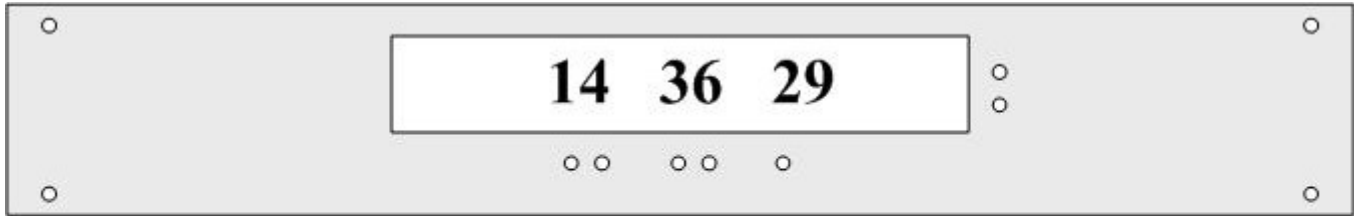

Front View

### Features:

The reader reads the time and displays them in the 2137 format. This arrangement provides continuous monitoring of the reader output to assure that a valid high quality signal is being produced



**Time Code Reader TR100A2**

<b>Code Format</b>	2137
<b>Input</b>	BNC Connect at rear panel.
<b>Input Level Setting</b>	Automatic
<b>Minimum Input Required</b>	200 mc RMS. (560v p-p)
<b>Input Impedance</b>	10 K
<b>Readout</b>	6 digit (7 segment) .40" high LED's. Indicates hours, minutes and seconds in 24 hour military format.
<b>Power Requirement</b>	115 volt AC (100 - 130 range) or 230 volt AC (215 - 250 range) field selectable. 50 to 60 Hz. .15 watt.
	Optional:
	12 volt D.C. (10 - 15 range) or 24 volt D.C. (20 - 30 range). (For 12 volt option specify Model 204A2 - 222D12. For 24 volt option, specify model 204A3-D24. )
<b>Temperature Operating</b>	0° C To 50° C (Non-condensing).
<b>Temperature Storage</b>	-40° C To +70° C
<b>Size</b>	19.0" wide
	1.75 " high
	7.5 deep
<b>Weight</b>	6 lbs. (2.8kg).

2005-12-05